

Excavator Base


Connector Plate

KINGHITTER

1. Select Connector-type & Pin Diameter (Ø)


Type A: Two Welded-in-Pins (Suits Quick-Hitch)

Ø35	Ø60
Ø40	Ø65
Ø45	Ø70
Ø50	Ø75
Ø55	Ø80

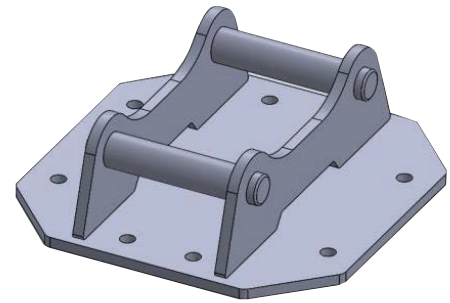


Type S: One Welded Pin & Single (Removable Draw-Pin)

Ø35	Ø60
Ø40	Ø65
Ø45	Ø70
Ø50	Ø75
Ø55	Ø80

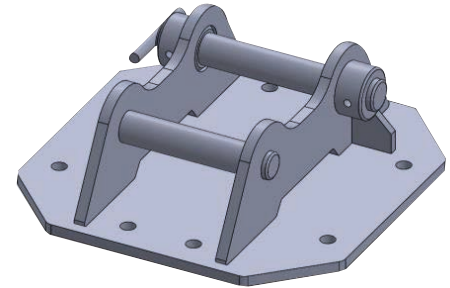

Type D: Double Removable (Draw-Pins - will not fit Quick-Hitch.)

Ø35	Ø60
Ø40	Ø65
Ø45	Ø70
Ø50	Ø75
Ø55	Ø80

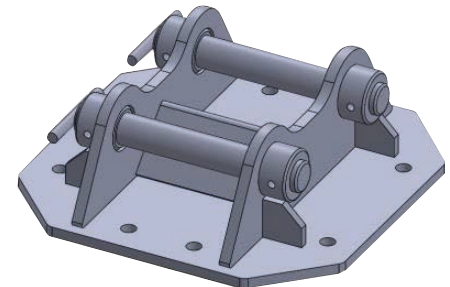

2. Select Standard Pin Centre-line dimension


160mm	260mm	360mm
170mm	270mm	370mm
180mm	280mm	380mm
190mm	290mm	390mm
200mm	300mm	400mm
210mm	310mm	410mm
220mm	320mm	420mm
230mm	330mm	430mm
240mm	340mm	440mm
250mm	350mm	450mm
210mm	310mm	410mm

Non-Standard (\$150 additional surcharge)

Write Here: mm

Pin Center-line (mm)

Pin Diameter (mm)

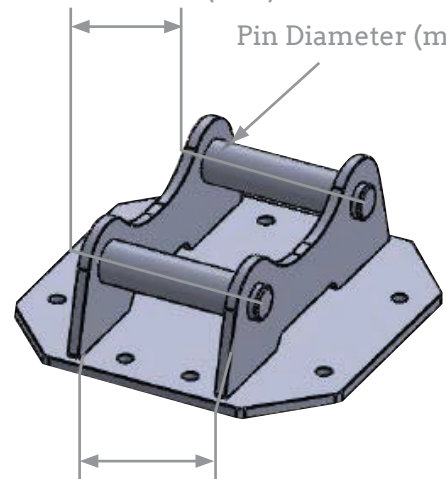

Gap between Plates (mm)

3. Select Standard Gap Between Plates dimension

140mm	200mm	260mm
150mm	210mm	270mm
160mm	220mm	280mm
170mm	230mm	290mm
180mm	240mm	300mm
190mm	250mm	310mm

Non-Standard (\$150 additional surcharge)

Write Here: mm

Name:

Address:

Phone:

Email:

Dealer:

Date:

Signed by Customer: